


| 料号<br>Part NO. | 品名<br>Parts Name | 型号<br>Part NO. | 长度<br>Lenght<br>(mm) | 宽度<br>Width<br>(mm) | 孔径<br>Hole Dia<br>(mm) | 适用板厚<br>Panel Thickness<br>(mm) | 最大线束径<br>Max. Bundle Dia<br>(mm) | 包装<br>packing |
|----------------|------------------|----------------|----------------------|---------------------|------------------------|---------------------------------|----------------------------------|---------------|
| 31-E25-070     | 汽车束线带HIWA        | 9970           | 158                  | 7.0                 | *                      | 1.0-3.0                         | 35                               |               |



材质: UL合格之 NYLON 66 ,  
锰钢镀达克罗金属片, 防火等  
级94V-2;  
温度: 可达105℃ ;  
颜色: 黑色;  
未注公差 +/-0.5mm。

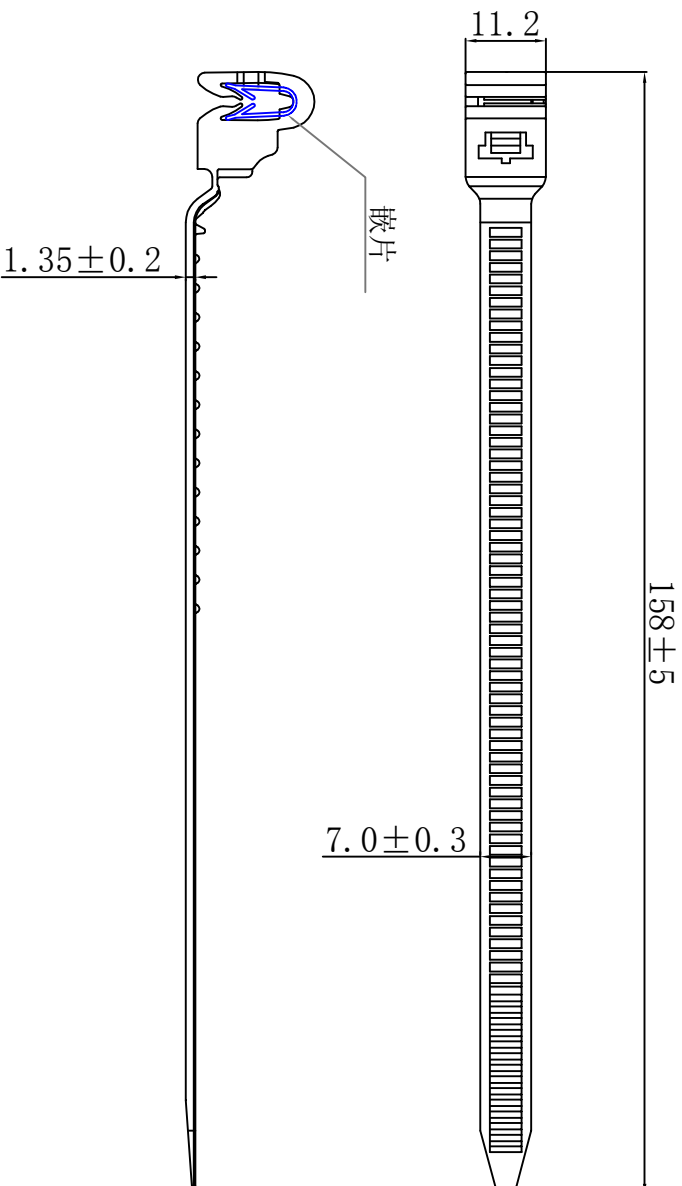

未经并受权不得修改和复印  
该知识产权属于技术质量部

| DIMENSION        |  | TOLERANCES   |          |                         |         |          |                 |      |      |         |         |
|------------------|--|--------------|----------|-------------------------|---------|----------|-----------------|------|------|---------|---------|
| 0.0<br>0.00      |  | ± 0.50       |          |                         |         |          |                 |      |      |         |         |
| FIRST ANGLE PROJ |  | A            | NEW PART | DATE                    | DWG. BY | CHK. BY  | REVISION RECORD | LTR. | DATE | DWG. BY | CHK. BY |
|                  |  |              |          | 2024/08                 | caulian | zy. wang |                 |      |      |         |         |
| DWG. BY          |  | lin liang    | UNIT     | mm                      |         |          |                 |      |      |         |         |
| CHK. BY          |  | caulian      | REV.     | A                       |         |          |                 |      |      |         |         |
| APP. BY          |  | wang zhiqian | DWG. NO. | HIWA/QR-JZ-31-HIWA-9970 |         |          |                 |      |      |         |         |