

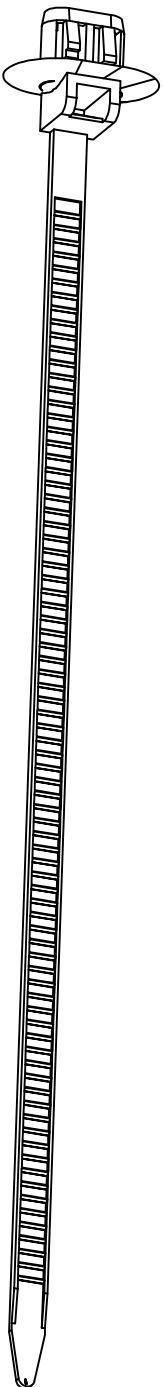
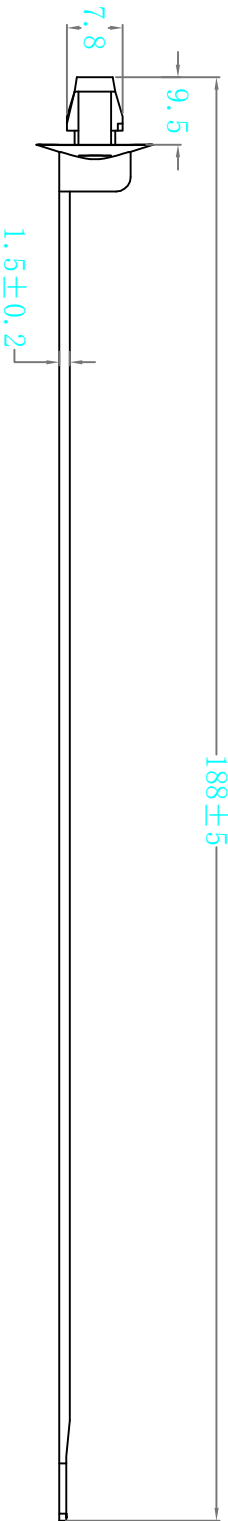


料号 Part NO.	品名 Parts Name	型号 Part NO.	长度 Lenght (mm)	宽度 Width (mm)	孔径 Hole Dia (mm)	适用板厚 Panel Thickness (mm)	最大线束径 Max. Bundle Dia (mm)	包装 packing
31-E104-200600000	汽车束线带LR	200600000	188	5.1	12.0*7.0	0.6-2.0	45	

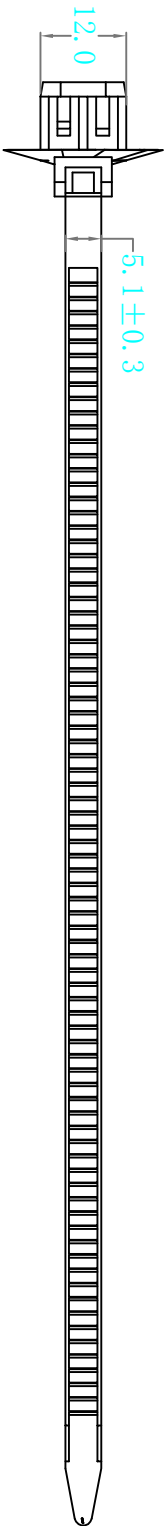

材质：采用UL认证尼龙66，防火等级94V-2、耐酸、耐腐蚀、绝缘性好、不宜老化、承受力强。
温度：可达105℃。
颜色：黑色；
未注公差 +/-0.5mm。



DIMENSION		TOLERANCES							
0.0 0.00		± 0.50							
FRIST ANGLE PROJ				A	NEW PART	<i>callinan</i>	<i>ly. wang</i>	<i>2010/05/10</i>	
				L.T.R.	REVISION RECORD	DWG. BY	CHK. BY	DATE	
DWG. BY		<i>lin liang</i>		UNIT	mm				
CHK. BY		<i>callinan</i>		REV.	A				
APP. BY		<i>wang zhiyuan</i>		DWG. NO.	HWA/GR-JZ-3I-LR-200600000				
 惠州华华电子科技有限公司									