



料号 Part NO.	品名 Parts Name	型号 Part NO.	长度 Lenght (mm)	宽度 Width (mm)	孔径 Hole Dia (mm)	适用板厚 Panel Thickness (mm)	最大线束径 Max. Bundle Dia (mm)	包装 packing
31-EI04-T50XWPM7	汽车束线带LR	T50XWPM7 (126-00168)	143	4.6	6.3-7.0	0.7-3.0	27	



材质：采用UL认证尼龙66, 防火等级94V-2、耐酸、耐腐蚀、绝缘性好、不易老化、承受力强；
温度：可达105℃；
颜色：黑色；
未注公差 ± 0.5 mm。

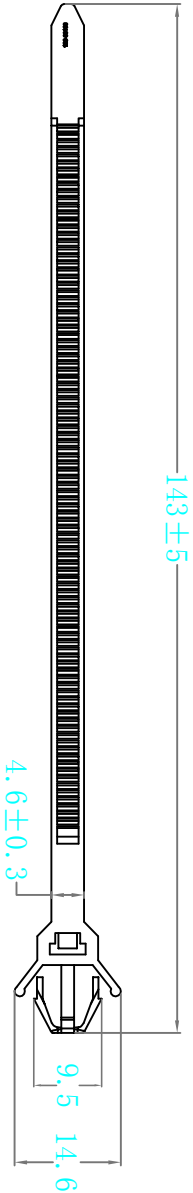

DIMENSION		TOLERANCES							
0.0 0.00		± 0.50							
FIRST ANGLE PROJ									
	A	NEW PART	<i>wallace</i>	<i>3y. wang</i>	<i>2024/10</i>				
	LTR.	REVISION RECORD	DWG. BY	CHK. BY	DATE				
		DWG. BY	<i>liu liang</i>	UNIT	mm				
		CHK. BY	<i>wallace</i>	REV.	A				
		APP. BY	<i>wang zhiyuan</i>	DWG. NO.	HIWA/QR-JZ-31-LR-T50XWPM7 (126-00168)				

未经受权不得修改和复印
该知识产属于技术质量部
惠华电子科技有限公司