



料号 Part NO.	品名 Parts Name	型号 Part NO.	长度 Lenght (mm)	宽度 Width (mm)	孔径 Hole Dia (mm)	适用板厚 Panel Thickness (mm)	最大线束径 Max. Bundle Dia (mm)	包装 packing
31-E25-062	椭圆孔密封圈固定扎带	T60S0SSFT70*120-E-MD (126-00209/126-00079)	157.7	5.5	7.0*12.0	0.6-2.0	30	

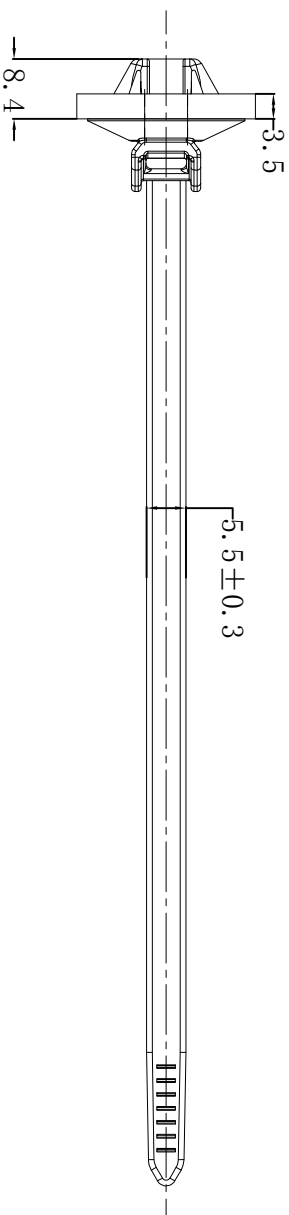


材质:

a: 采用UL认证尼龙66, 防火等级94V-2、耐酸、耐腐蚀、绝缘性好、不宜老化、承受力强

b: Cellular rubber CR
温度: 可达105°C;
颜色: 黑色;

未注公差 : ± 0.5mm

带泡沫橡胶圆盘最大限度地减少了灰尘、污垢和水汽的进入

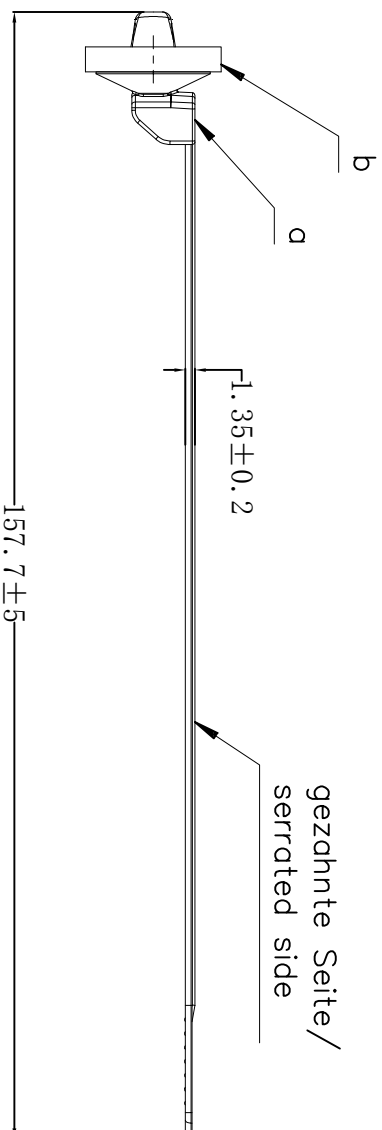

未经授权不得修改和复印
该知识产属于技术质量部

DIMENSION		TOLERANCES									
0.0 0.00		± 0.50									
FIRST ANGLE PROJ				A		NEW PART		outliuan		zy wang	
				L.T.R.		REVISION RECORD		DWG. BY		CHK. BY	
										DATE	