


料号 Part NO.	品名 Parts Name	型号 Part NO.	长度 Length (mm)	宽度 Width (mm)	孔径 Hole Dia (mm)	适用板厚 Panel Thickness (mm)	最大线束径 Max. Bundle Dia (mm)	包装 packing
31-E25-025	汽车束线带HIWA	RQXP-165B	166	6.8	6.5-7.0	1.0-3.0	35	



备注:

材质: 采用UL认证尼龙66, 防火等级94V-2、耐酸、耐腐蚀、绝缘性好、不易老化、承受力强;
 温度: 可达105°C;
 颜色: 黑色;
 未注公差 +/-0.5mm。

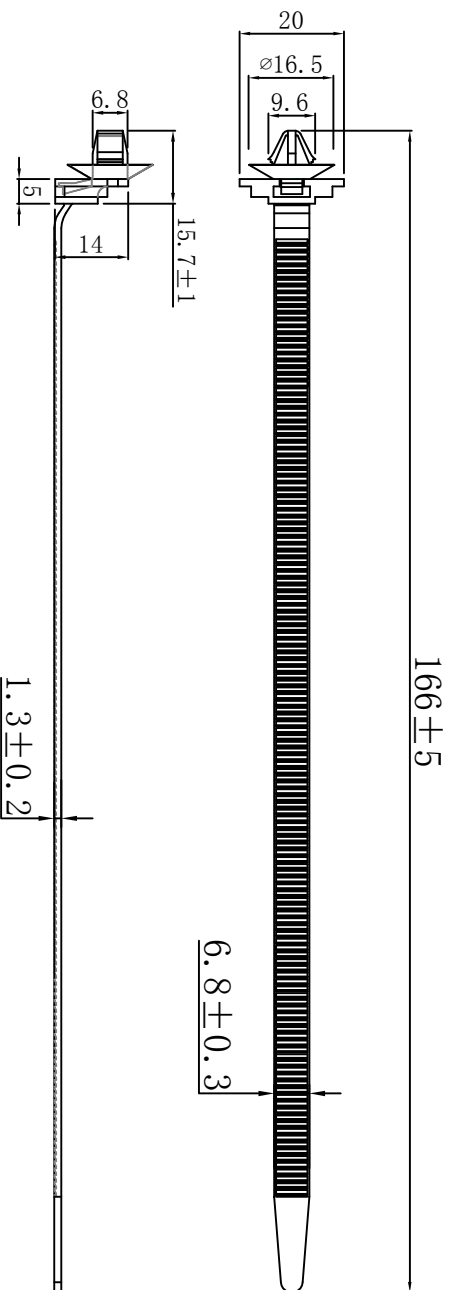

未经并受权不得修改和复印
 该知识产属于技术质量部

DIMENSION	TOLERANCES	DWG. BY		UNIT	mm
0.0	±0.50	liu liang		UNIT	
0.00		CHK. BY	allucian	REV.	A1
FIRST ANGLE PROJ		APP. BY	wang zhiyuan	DWG. NO.	HIWA/OR-17-31-HIWA-RQXP-165B
		LTR.	A	NEW PART	
		REVISION RECORD	update tolerances	DWG. BY	allucian
		CHK. BY	zy_wang	DATE	2022/10/28
		DWG. BY	allucian		
		CHK. BY	zy_wang		
		DATE	2022/10/28		