

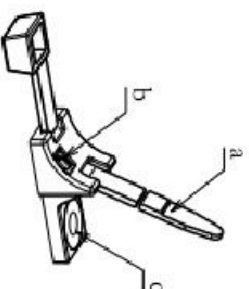


料号 Part NO.	品名 Parts Name	型号 Part NO.	长度 Lenght (mm)	宽度 Width (mm)	孔径 Hole Dia (mm)	适用板厚 Panel Thickness (mm)	最大线束径 Max. Bundle Dia (mm)	包装 packing
31-D180-HIWAJ01-00014	汽车束线带	T120RCPCM6	390	7.6	M6螺柱	*	105	

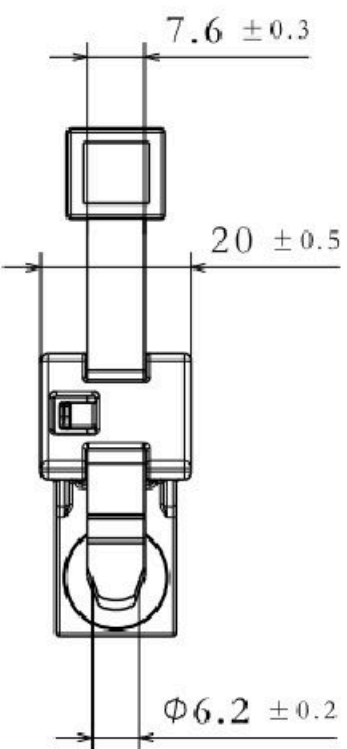

Isometric view
Scale 1:2

材质:
a和b:采用UL认证尼龙66, 防火等级
94V-2、耐酸、耐腐蚀、绝缘性好、不
宜老化、承受力强;
c:切削钢
温度: 可达105℃;
颜色: 黑色;
未注公差: ±0.5mm。

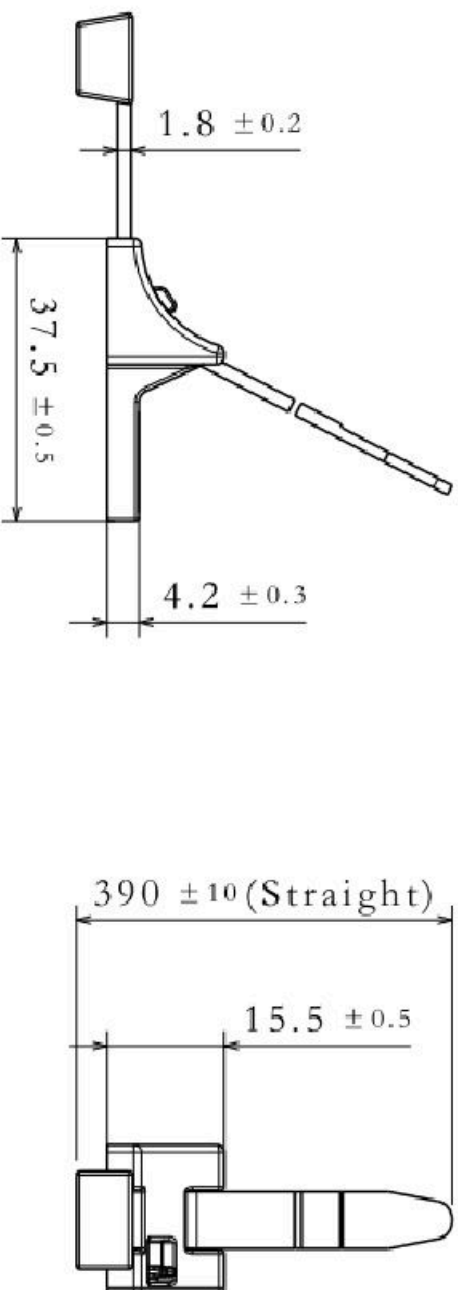

未经受权不得修改和复印
该知识产属于技术质量部

DIMENSION		TOLERANCES									
FRIST ANGLE PROJ	0.0	±0.50								DWG. BY	liu liang
	0.00									CHK. BY	callian
L.T.R.	A									APP. BY	wang zhiyan
										DWG. NO.	HIWA/QR-JZ-31-D180-T120RCPCM6
										UNIT mm	
										REV. A	



苏州惠华电子科技有限公司