

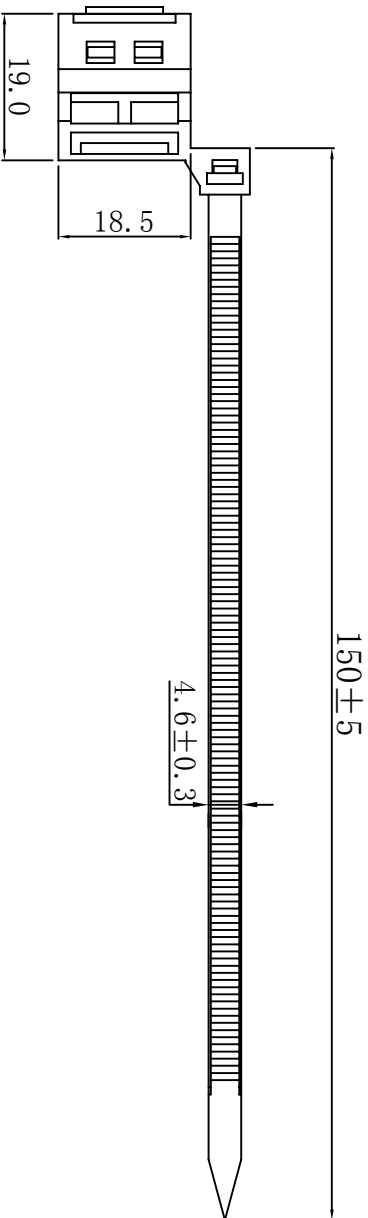


料号 Part NO.	品名 Parts Name	型号 Part NO.	长度 Lenght (mm)	宽度 Width (mm)	孔径 Hole Dia (mm)	适用板厚 Panel Thickness (mm)	最大线束径 Max. Bundle Dia (mm)	包装 packing
31-E25-060	汽车束线带HIWA	T50S05WA4. 3E (148-00092)	150	4.6	ø4.3±0.3	/	35	

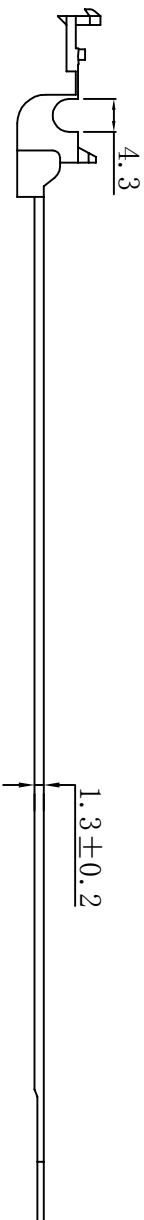

材质：采用UL认证尼龙66，防火等级94V-2、耐酸、耐腐蚀、绝缘性好、不宜老化、承受力强；
温度：可达105℃；
颜色：黑色；
未注公差：±0.5mm。

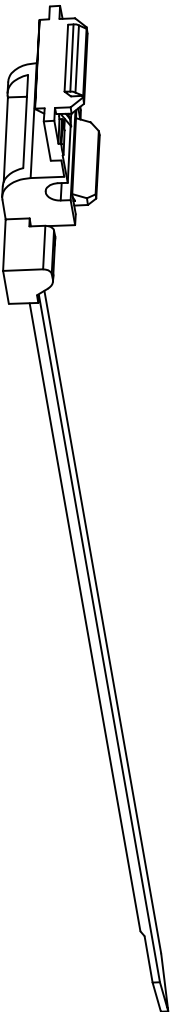

DIMENSION		TOLERANCES							
0.0 0.00		±0.50							
FIRST ANGLE PROJ		A	NEW PART	DATE	DWG. BY	CHK. BY	REVISION RECORD	LTR.	
			<i>allucian</i>	<i>2024/10</i>	<i>allucian</i>	<i>3y. wang</i>			
DWG. BY		CHK. BY	APP. BY						
<i>liu liang</i>		<i>allucian</i>	<i>wang zhiyuan</i>						
UNIT		REV.	DWG. NO.						
mm		A	HIWA/QR-JZ-31-HIWA-T50S05WA4. 3E (148-00092)						

惠华电子科技有限公司
未经受权不得修改和复印
该知识产权属于技术质量部